



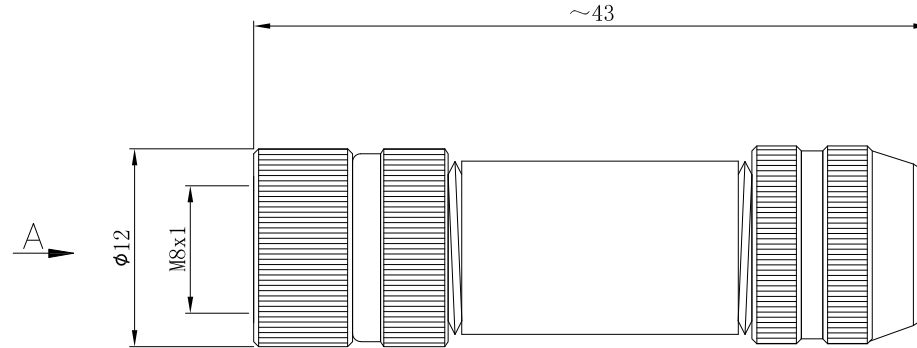

Product NO.		RHT-634-3127			
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
First	First issue	Ding	2022/04/01	JIM. KING	

Pin Layout:

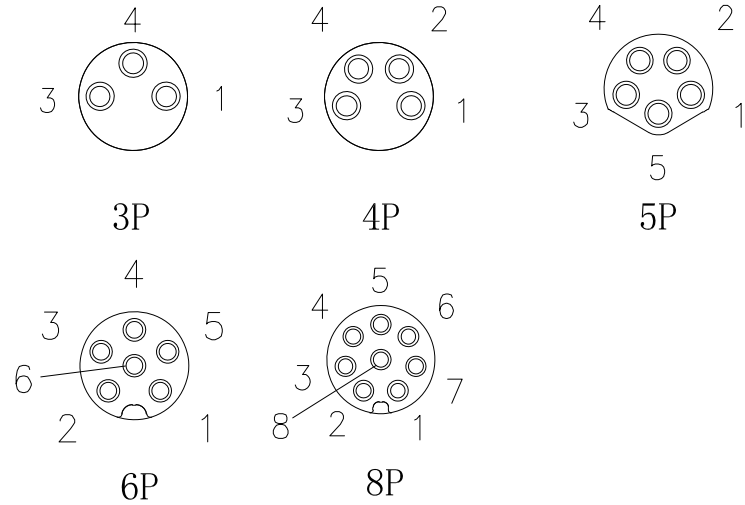

NOTES:

- Rated voltage/current :
 3P 60V/3A
 4P 60V/3A
 5P 30V/3A
 6P 30V/1.5A
 8P 30V/1.5A
- Cable Range: 3.5~5mm
- Wire connection mode: solder
- Operating temperature: -40°C ~+85°C
- RoHS Compliance

5	Nut	ZINC	Nickel	1
4	Body	ZINC	Nickel	1
3	Nut M8*1	ZINC	Nickel	1
2	Insulator	PA66	Black	1
1	Contacts	Brass	Gold	3~8
NO	Description	Material	Finish	Qty

-TOLERANCES- UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.15mm 8 - 30mm ± 0.20mm 30 -120mm ± 0.30mm		RENHOTEC GROUP				
		PART DESCRIPTION: M8 female metal assembly plug, shielded				
Appr: JIM. KING	P/N: RHT-634-3127					
Check:	Date	Scale	Unit	Type	Page	
Draw: Ding	2022. 04. 01	Free	MM	Z	1/1	