
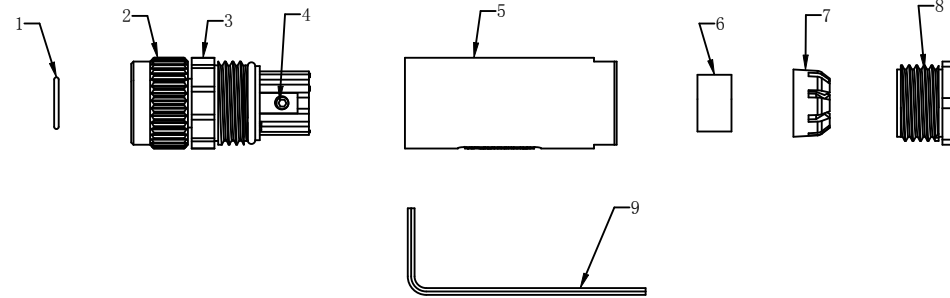




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A / 0	First release	Ding	2023.06.02

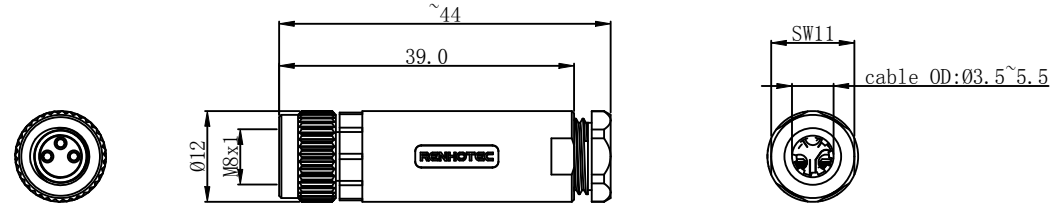

NOTES:

- Rated voltage/current : 3pin: 60V/3A
4pin: 60V/3A
- Wire Range :
3pin: 24-22AWG/0.25~0.34mm²
4pin: 24-22AWG/0.25~0.34mm²
- Cable Range: OD03.5~05.5mm
- Wire connection mode: Screw
- Operating temperature: -40°C ~+85°C
- RoHS Compliance

9	Hex key	Carbon Steel	1	PCS
8	Pressure Screw	PA66 UL94-V0	1	PCS
7	Pinch ring	PA66 UL94-V0	1	PCS
6	Seal	NBR, Black	1	PCS
5	Body	PA66 UL94-V0	1	PCS
4	Contact	Brass with gold plated	3-4	PCS
3	Insert	PA66 UL94-V0	1	PCS
2	Screw	Brass with nickel plated	1	PCS
1	O-ring	NBR, Black	1	PCS
编号 No.	品名 Part Name	描述 Description	单位 Unit	用量 Qty

RENHOTEC GROUP

客户料号 Cus' P/N	图号 File No.	RHT-634-3369	品名 Name	M8 Female connector Assembly, Screw joint	
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	
		mm	A/0	日期 Date	
线性 Linear	0.5~6 >6~30 >30	±0.1 ±0.2 ±2%	比例 Scale	---	
角度 Angles	±3°		页码 Page	1/1	
<p>Third Angle Projection</p>			图纸确认 DRAWING	APPROVAL	
			绘图 Drawing	Ding	2023.06.02
			审核 Checked	Jim	2023.06.02
			客户确认 Customer Approved		