

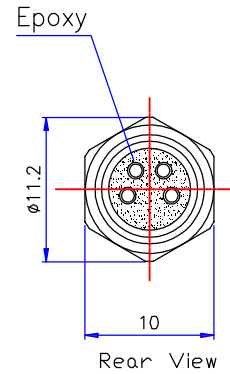


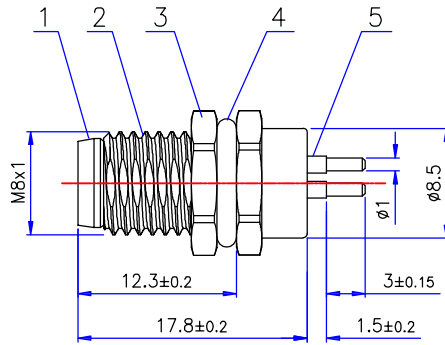

Product NO.



RHT-634-1307

ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2020/01/09	JIM. KING
R2.0	M8 adds 5-core buckle position	Gavin	2020/10/06	JIM. KING



NOTES:

- Rated voltage/current: 3pin: 60V/3A
4pin: 60V/3A
5pin: 60V/3A
6pin: 30V/1A
8pin: 30V/1A
- Withstanding voltage: 3, 4, 5pin: AC850V/1 Min
6, 8pin: AC650V/1 Min
- Levels of protection: IP67
- Connection mode: Soldering
- Operating temperature: -20°C ~+85°C
- RoHS Compliance

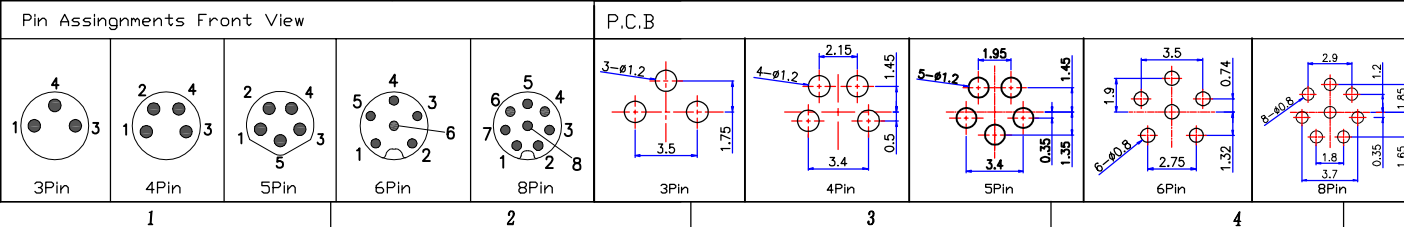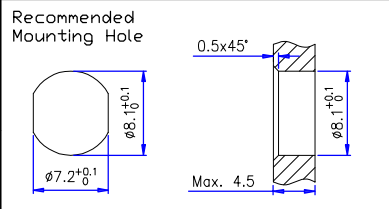

NO	Description	Material	Finish	Qty
5	Contacts	Brass	Gold	3-8
4	O-Ring	Rubber		1
3	Nut M8*1	Brass	Nickel	1
2	Body	Brass	Nickel	1
1	Insulator	PA66	Black	1
NO	Description	Material	Finish	Qty

<p>-TOLERANCES- UNLESS OTHERWISE SPECIFIED</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm</p>			<p>RENHOTEC GROUP</p>			
	<p>APPR: JIM. KING</p>		<p>PART DESCRIPTION: Circular Panel Mount, Male, M8, Front Mount, DIP</p>			
<p>Check:</p>	<p>Date</p>	<p>Scale</p>	<p>Unit</p>	<p>Type</p>	<p>Page</p>	
<p>Draw: Gavin</p>	<p>2020.10.06</p>	<p>Free</p>	<p>MM</p>	<p>Z</p>	<p>1/1</p>	

5

6