




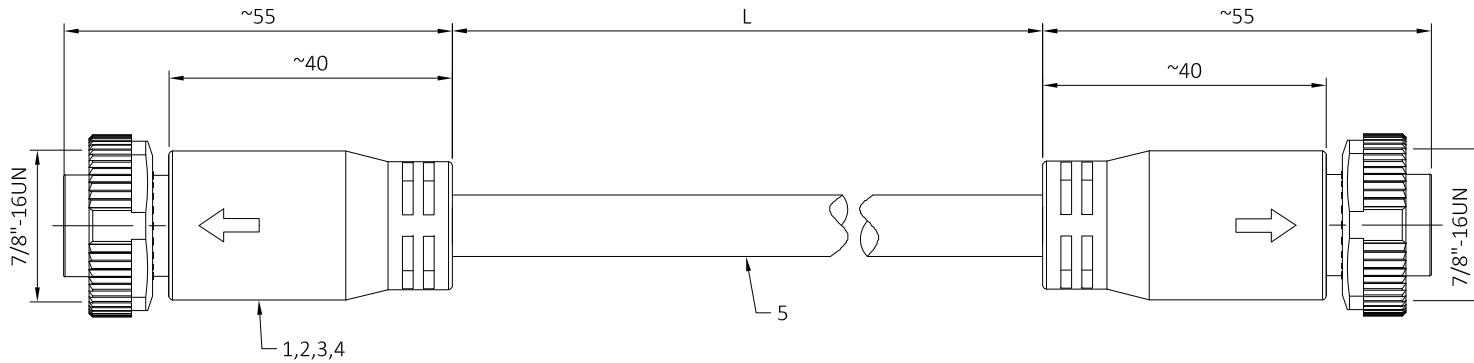

P1



P2



Order NO. Description

78022 - XX - X - XXXX

POLES

- 03=3Poles
- 04=4Poles
- 05=5Poles

CABLE LENGTH(cm)

- 30=30cm
- 100=100cm
- 1000=1000cm

CABLE SHEATH

- C=PVC
- R=PUR

Technical specifications:

1. Rated voltage/current:
3P 300V/13A
4P 300V/13A
5P 300V/9A
2. Degree of protection:IP67
3. Temperature range:-25°C~+80°C
4. Mating cycles:≥500
5. Contact resistance:≤5mΩ

Pin Assignment

Pin layout			
	3PIN	4PIN	5PIN
Wire gauge	18AWG	18AWG	20AWG
PIN1	GN/YE	Black	Black
PIN2	Brown	Blue	Blue
PIN3	Blue	Brown	GN/YE
PIN4		White	Brown
PIN5			White


5	Cable	AWG18/20 3~5C,PVC OR PUR ,Black	1
4	Molding	PVC ,Black	1
3	Nut	ZINC; Nickel plated	2
2	Housing	TPU,Black	2
1	Contact	Female pin,Brass; Gold-plated	6~10
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm



RENHOTEC GROUP



PART DESCRIPTION:
Double 7/8" Female, Molding type

Appr:	JIM.KING	P/N: 78022-XX-X-XXXX			
Check:	Date	Scale	Unit	Type	Page
Draw:	DING	2022.12.06	Free	MM	Z 1/1