

Thread	A	B
PG11	18.7	17
PG13.5	20.5	18.8
M20x1.5	20.1	17.8

Recommended
Panel cut-out


- Technical specifications:
- Rated voltage/current:
 - 3P 300V/13A
 - 4P 300V/13A
 - 5P 300V/9A
 - Degree of protection: IP67
 - Temperature range: -25°C ~ +80°C
 - Mating cycles: ≥ 500
 - Contact resistance: ≤ 5mΩ

Order NO. Description

78005 - XX - XXX

SERIES	POLES	Mounting thread
Mini-change(7/8"),Male Rear fastened,solder type	03=3Poles 04=4Poles 05=5Poles	PG11 PG13.5 M20x1.5

Pin Assignment

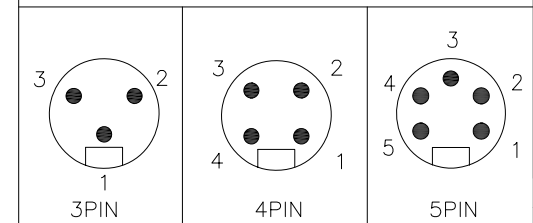

5	Pin	Brass; Gold-plated	3~5
4	Nut	Brass; Nickel plated	1
3	O-Ring	Rubber, Black	1
2	Body	7/8" male Shell, Brass; Nickel plated	1
1	Housing	TPU,Black	1
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP				
	PART DESCRIPTION: 7/8" male connector, Panel Mount, Rear fastened,Solder type				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr:	JIM.KING			
	Check:	Date	Scale	Unit	Type
	Draw:	2022.12.06	Free	MM	Z
P/N:		78005-XX-XXX			
Date		2022.12.06	Scale	Free	Unit
Type		Z	Page		1/1