




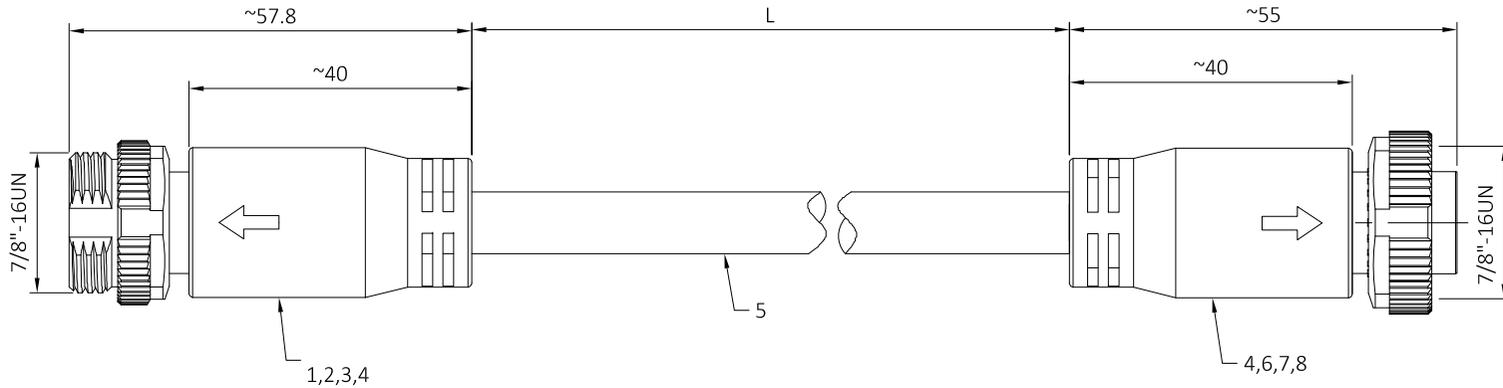

P1



P2



Order NO. Description

78021 - XX - X - XXXX

POLES
03=3Poles
04=4Poles
05=5Poles

CABLE LENGTH(cm)
30=30cm
100=100cm
1000=1000cm

CABLE SHEATH
C=PVC
R=PUR

Technical specifications:

- Rated voltage/current:
3P 300V/13A
4P 300V/13A
5P 300V/9A
- Degree of protection:IP67
- Temperature range:-25°C~+80°C
- Mating cycles:≥500
- Contact resistance:≤5mΩ

Pin Assignment			
Pin layout female			
Pin layout male			
Wire gauge	18AWG	18AWG	20AWG
PIN1	GN/YE	Black	Black
PIN2	Brown	Blue	Blue
PIN3	Blue	Brown	GN/YE
PIN4		White	Brown
PIN5			White

8	Screw nut	ZINC; Nickel plated	1
7	Housing	TPU,Black	1
6	Contact	Female pin,Brass; Gold-plated	3~5
5	Cable	AWG18/20 3~5C,PVC OR PUR ,Black	1
4	Molding	PVC ,Black	1
3	Screw	ZINC; Nickel plated	1
2	Housing	TPU,Black	1
1	Contact	Male pin,Brass; Gold-plated	3~5
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP	
	PART DESCRIPTION: 7/8" male to female, Molding type	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM.KING	P/N: 78021-XX-X-XXXX
	Check:	Date Scale Unit Type Page
	Draw: DING	2022.12.06 Free MM Z 1/1