

Thread	A	B
PG11	18.7	17
PG13.5	20.5	18.8
M20x1.5	20.1	17.8

Recommended
Panel cut-out


Order NO. Description

78007 - XX - XXX	
SERIES	Mounting thread
Mini-change(7/8"),female Rear fastened,solder type	PG11 PG13.5 M20x1.5
POLES	
03=3Poles 04=4Poles 05=5Poles	

Technical specifications:

- Rated voltage/current:
3P 300V/13A
4P 300V/13A
5P 300V/9A
- Degree of protection:IP67
- Temperature range:-25°C~+80°C
- Mating cycles:≥500
- Contact resistance:≤5mΩ

Pin Assignment

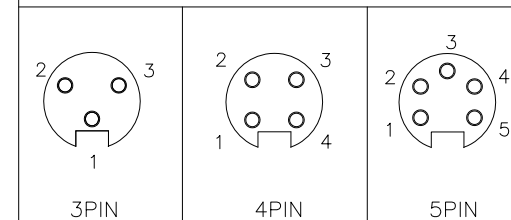


5	Pin	Brass; Gold-plated	3~5
4	O-Ring	Rubber, Black	1
3	Nut	Brass; Nickel plated	1
2	Body	7/8" female Shell, Brass; Nickel plated	1
1	Housing	TPU,Black	1
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm



RENHOTEC GROUP



PART DESCRIPTION:
7/8" female connector, Panel Mount, Rear fastened,Solder type

Appr: JIM.KING

P/N: 78007-XX-XXX

Check:

Date	Scale	Unit	Type	Page
2022.12.06	Free	MM	Z	1/1

Draw: DING