





Product NO.		RHT-634-3210		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2022.11.07	JIM.KING



19.71

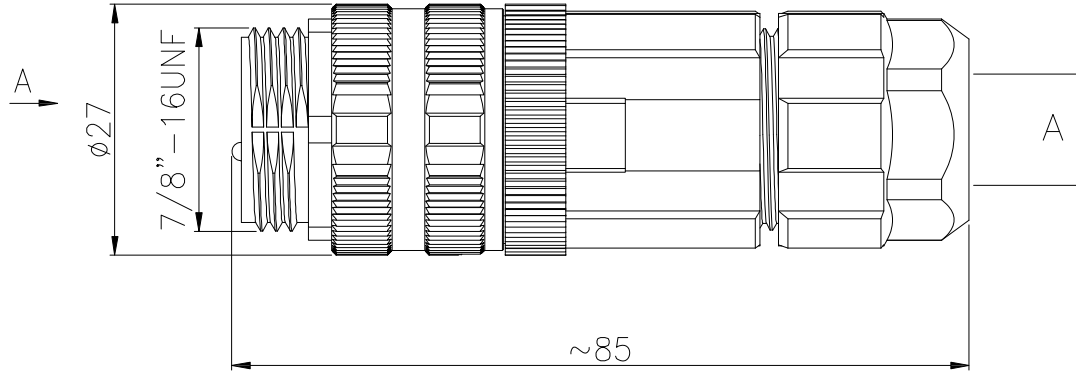


$\phi 27$
7/8" - 16UNF


~85

A:
PG9:6~8mm
PG13.5:10~12mm

Pin layout

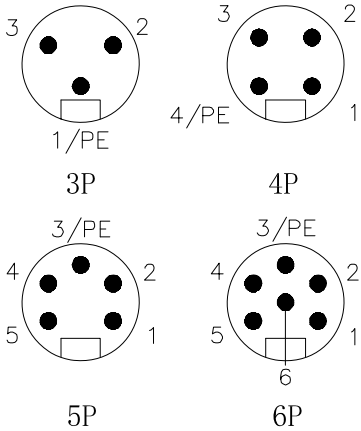

Order NO. Description

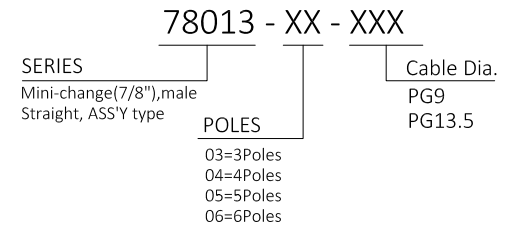

Technical specifications:		Materials:	
Coupling:	Threaded coupling	Shell material:	zinc alloy Tin plated
Termination:	screw fastening	Contact material:	Brass Gold plated
Coding:	A	Insert material:	PA66+GF UL94 black
Pollution degree:	3	Sealing:	Rubber,black
Temperature range:	-25°C ~ +85°C		
Degree of protection:	IP67 when mated		
Mating cycles:	≥100		
Rated voltage:	300V AC/DC		
Rated current:	3,4P:13A	5,6P:9A	
Contact resistance:	≤3 mΩ		
Insulation resistance:	≥4000 MΩ		

<p>-TOLERANCES- UNLESS OTHERWISE SPECIFIED</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm</p>	<p>RENHOTEC GROUP</p>					
	<p>PART DESCRIPTION: 7/8" male, ASS'Y type</p>					
	Appr:	JIM.KING	P/N: 78013 - XX - XXX			
	Check:	Date	Scale	Unit	Type	Page
Draw:	DING	2022.11.07	Free	MM	Z	1/1