






Product NO.		RHT-634-3210		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2022.11.07	JIM.KING



A →

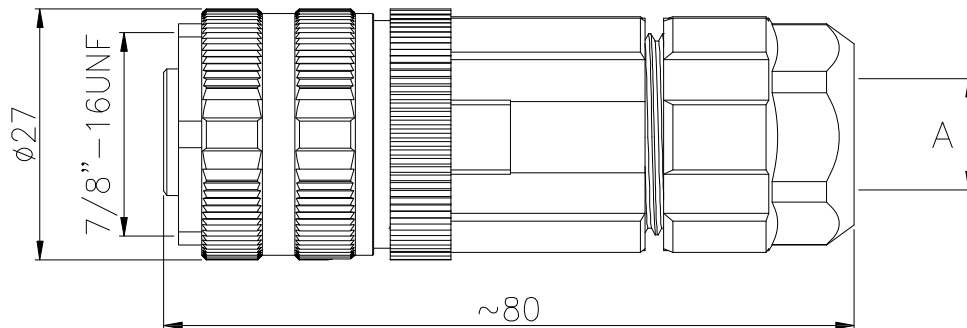

Pin layout

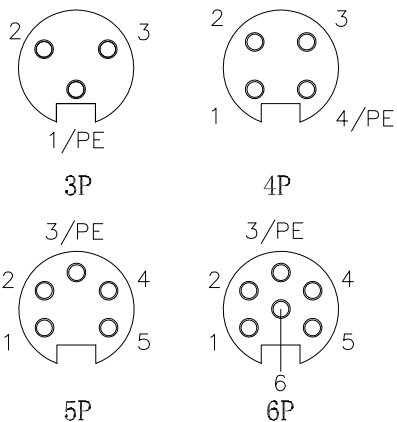

A:
PG9:6~8mm
PG13.5:10~12mm

Order NO. Description

78014 - XX - XXX

SERIES: Mini-change(7/8"),female
Straight, ASS'Y type

POLES: 03=3Poles, 04=4Poles, 05=5Poles, 06=6Poles

Cable Dia.: PG9, PG13.5

Technical specifications:		Materials:	
Coupling:	Threaded coupling	Shell material:	zinc alloy Tin plated
Termination:	screw fastening	Contact material:	Brass Gold plated
Coding:	A	Insert material:	PA66+GF UL94 black
Pollution degree:	3	Sealing:	Rubber,black
Temperature range:	-25°C ~ +85°C		
Degree of protection:	IP67 when mated		
Mating cycles:	≥100		
Rated voltage:	300V AC/DC		
Rated current:	3,4P:13A	5,6P:9A	
Contact resistance:	≤3 mΩ		
Insulation resistance:	≥4000 MΩ		

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP					
	PART DESCRIPTION: 7/8" Female, ASS'Y type					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr:	JIM.KING	P/N:	78014 - XX - XXX		
	Check:	Date	Scale	Unit	Type	Page
	Draw:	DING	2022.11.07	Free	MM	Z