

Recommended Panel cut-out

Order NO. Description

78011 - XX

SERIES

Mini-change(7/8"),female  
Front fastened,Solder type


POLES

03=3Poles  
04=4Poles  
05=5Poles

Technical specifications:

- Rated voltage/current:  
3P 300V/13A  
4P 300V/13A  
5P 300V/9A
- Degree of protection:IP67
- Temperature range:-25°C~+80°C
- Mating cycles:≥500
- Contact resistance:≤5mΩ

Pin Assignment

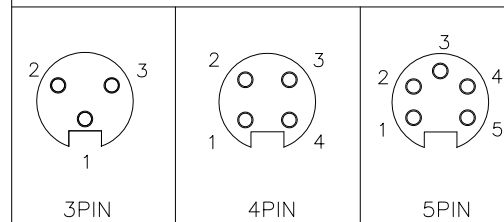

5	Pin	Brass; Gold-plated	3~5
4	O-Ring	Rubber, Black	1
3	Nut	Brass; Nickel plated	1
2	Body	7/8" female Shell, Brass; Nickel plated	1
1	Housing	TPU,Black	1
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>RENHOTEC GROUP</b>					
	PART DESCRIPTION: 7/8" female connector, Panel Mount, Front fastened,Solder type					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM.KING	P/N: 78011-XX				
	Check:	Date	Scale	Unit	Type	Page
	Draw: DING	2022.12.06	Free	MM	Z	1/1