

Recommended Panel cut-out

- Technical specifications:
- Rated voltage/current:
    - 3P 300V/13A
    - 4P 300V/13A
    - 5P 300V/9A
  - Degree of protection: IP67
  - Temperature range: -25°C ~ +80°C
  - Mating cycles: ≥500
  - Contact resistance: ≤5mΩ


Order NO. Description

78009 - XX

SERIES  
Mini-change(7/8"),Male  
Front fastened,Solder type

POLES  
03=3Poles  
04=4Poles  
05=5Poles

Pin Assignment

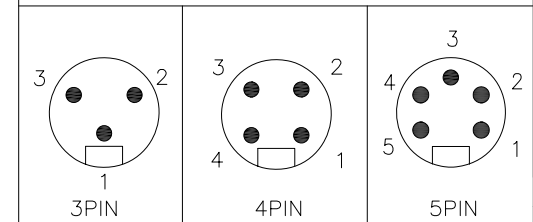

5	Pin	Brass; Gold-plated	3~5
4	O-Ring	Rubber, Black	1
3	Nut	Brass; Nickel plated	1
2	Body	7/8" male Shell, Brass; Nickel plated	1
1	Housing	TPU,Black	1
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>RENHOTEC GROUP</b>					
	PART DESCRIPTION: 7/8" male connector, Panel Mount, Front fastened,Solder type					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM.KING	P/N: 78009-XX				
	Check:	Date	Scale	Unit	Type	Page
	Draw: DING	2022.12.06	Free	MM	Z	1/1