


- Technical specifications:
- Rated voltage/current:  
3P 300V/13A  
4P 300V/13A  
5P 300V/9A
  - Degree of protection: IP67
  - Temperature range:  $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$
  - Mating cycles:  $\geq 500$
  - Contact resistance:  $\leq 5\text{m}\Omega$

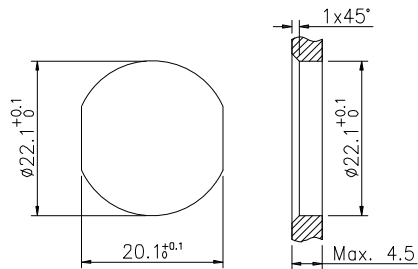

Recommended Panel cut-out

Order NO. Description

78010 - XX

SERIES

Mini-change(7/8''),Male Front fastened,PCB type

POLES

03=3Poles  
04=4Poles  
05=5Poles

Series	3PIN	4PIN	5PIN
PIN Layout			
PCB Layout			


5	Pin	Brass; Gold-plated	3~5
4	O-Ring	Rubber, Black	1
3	Nut	Brass; Nickel plated	1
2	Body	7/8" male Shell, Brass; Nickel plated	1
1	Housing	TPU,Black	1
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES-  
UNLESS OTHERWISE  
SPECIFIED

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm  $\pm 0.20\text{mm}$   
8 - 30mm  $\pm 0.25\text{mm}$   
30 - 120mm  $\pm 0.30\text{mm}$



**RENHOTEC GROUP**



PART DESCRIPTION:

7/8" male connector, Panel Mount, Front fastened,PCB type

Appr: JIM.KING

P/N: 78010-XX

Check:

Date	Scale	Unit	Type	Page
2022.12.06	Free	MM	Z	1/1

Draw: DING